





U2020-J

INDOOR TOTEM PREMIUM SERIES



INDOOR TOTEM CLASSIC










Industrial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy.



The 4K Ultra HD display delivers incredible image quality with four times resolution higher than Full HD.

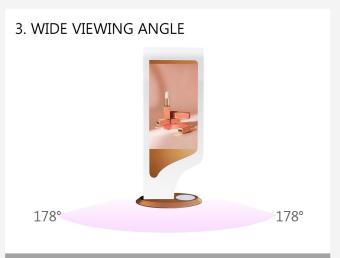


These displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.

4. SCROLLING TEXT



You can display a "ticker tapy" style scrolling text message along the bottom of the screen.

5. SURFACE PLASMA TREATMENT

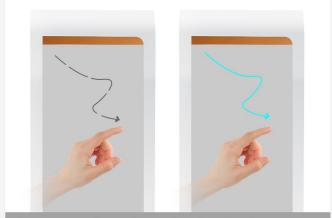

The oleophobic coating makes the glass front more resistance to oil and water residue left by fingerprint marks and makes touch gestures smoother.

6. 10 POINT PCAP / IR TOUCH




Manipulate images, zoom in an out as well as perform many other touch gestures; Multiple users interacting with the screen at one time.





Integrated with two stereo speakers for audio element requirement.

8.FREE SCHEDULING SOFTWARE

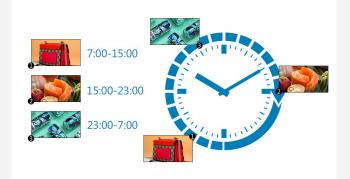

Playlist can be scheduled for displaying different content at different times of the day.

9.POWER TIMER



The screen can be set to automatic daily o weekly timing switches on and off.

10. 24/7 USAGE




The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

11.ANDROID OR WINDOWS OS




Built-in Android 7.1 operating system and Windows 10 operating system options. You can also use your media player if required.

12.NETWORK REMOTE CONTROL

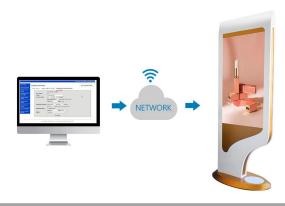

LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.



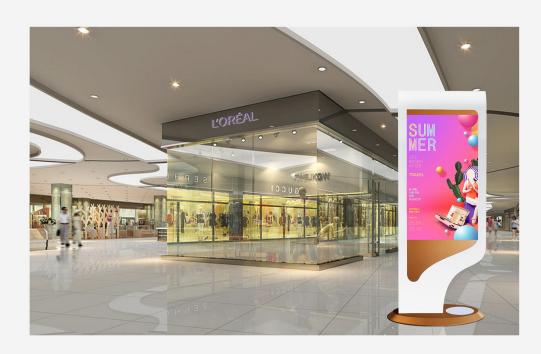














HONOR

AUDITED SUPPLIER











PATENT





















SIZE 49"

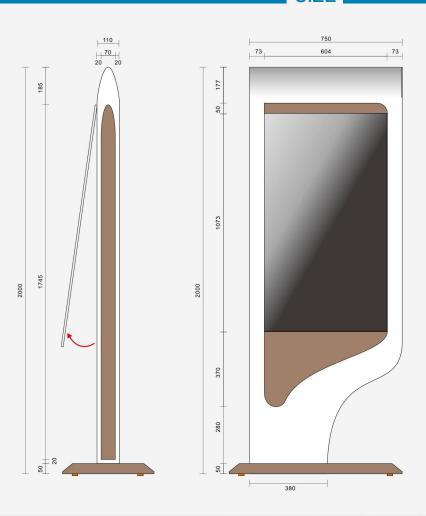

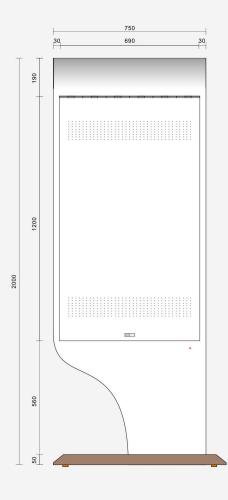

OTHER AVAILABLE SIZES: 43" 49" 55"

CONTENT MANAGEMENT DEVICE MANAGEMENT REMOTE CONTROL









- 1 CARTON BOX
- **2** WOODEN CASE





1FLIGHT CASE




SPECIFICATION

ITEM	DETAILS	TECHNICAL PARAMETERS			
Hardware data	Size	43inch	49inch	55inch	
	Display area (mm)	941.1*529.4	1084.8x610.2	1209.6x680.4	
	Referent dimension(H*W*T mm)	1850*640*110	1900*750*110	2020*798*110	
	Resolution	1920x1080 / 3840x2160			
	Brightness	$350 \text{ cd/m}^2 / 500 \text{ cd/m}^2 / 700 \text{ cd/m}^2 / 1000 \text{ cd/m}^2$			
	Viewing angle	178° (H) / 178° (V)			
	Contrast ratio	1400:1			
	Shell material	aluminum profile,metal plate,tempered safety glass			
	Spearker	2X8Ω5W			
Power supply	Switch power	110-240VAC@ 50/60Hz			
Power consumption	Max Power consumption	55W	60W	80W	

ITEM	DETAILS	TECHNICAL PARAMETERS
	Motherboard	RK3288/ RK 3399
	CPU	Cores:4; Basic frequency:1.8 GHz ,Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU
	Operating System	Android 5.1/ 7.1
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4
	Memory	2G
Android version	Storage	16G
	RJ45 LAN interface	100M/1000M
	USB	4 USB 2.0 / 2 USB 3.0
	Player Software	content management system
	Audio support	Intergrated
	Output interface	HDMI *1
	Motherboard	H110
	CPU	Intel i5 ≥6th generation(i3 & i7 for option)
	Operating System	Windows 10 Pro
	Graphics	Intel HD Graphics
	Memory	4G RAM
Windows version	Storage	120G SSD
Williadws Version	RJ45 LAN interface	100M/1000M
	USB	USB*1, SD card*1
	Player Software	To be specified by the client
	Audio support	Intergrated
	Output interface	HDMI*1, VGA*1

ITEM	DETAILS	TECHNICAL PARAMETERS
	Motherboard	SX-260
	CPU	HD video decoding chip
	Operating System	uCOS
	Memory	DDR 128MB
Standalone	Storage	NAND Flash 16G
version	Video format	MPEG1, MPEG2, MPEG4, H264, WMV
	USB	USB*1, SD card*1
	Input interface	HDMI*1,USB*1
	USB	none
Driver board version	Audio support	PC audio, earphone input
board version	input interface	HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1
	Operating temperature	0° C \sim +40 $^{\circ}$ C
Application	Storage temperature	-20°C ∼ +60°C
Environment	Humidity	10-80% RH Non-condensing
	WiFi access point	Yes
Options	Cellular router	3G or 4G
Ориона	Touchscreen	capacitive touch
	LED backlit company logo	Yes



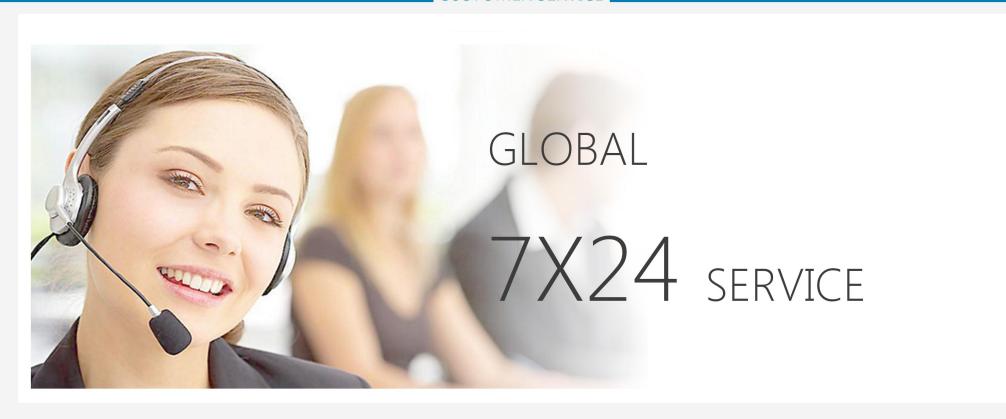



REMOTE TECHNICAL SUPPORT

